


100 →

OAM Function Type codepoint (Hex)	First octet of OAM packet payload Function Type and Purpose
00	Reserved
01	CV (Connectivity Verification)
02	FDI (Forward Defect Indicator)
03	BDI (Backward Defect Indicator)
04	Reserved for Performance packets
05	Reserved for LB-Req (Loopback Request)
06	Reserved for LB-Rsp (Loopback Response)

Fig. 1

200



Function Type (01Hex)	Reserved (all 00Hex)	LSP Trail Termination Source Identifier	Padding (all 00Hex)	BIP16
1 octet	3 octets	20 octets	18 octets	2 octets

Fig. 2

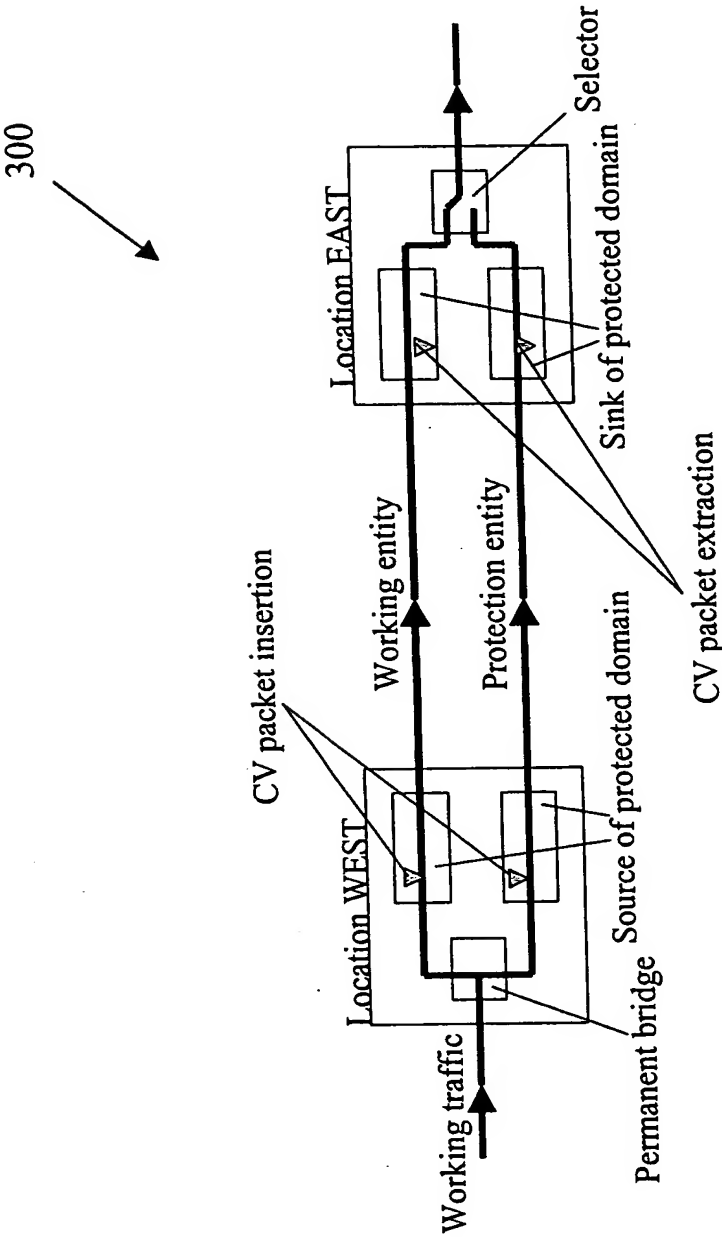


Fig. 3

Fig. 4

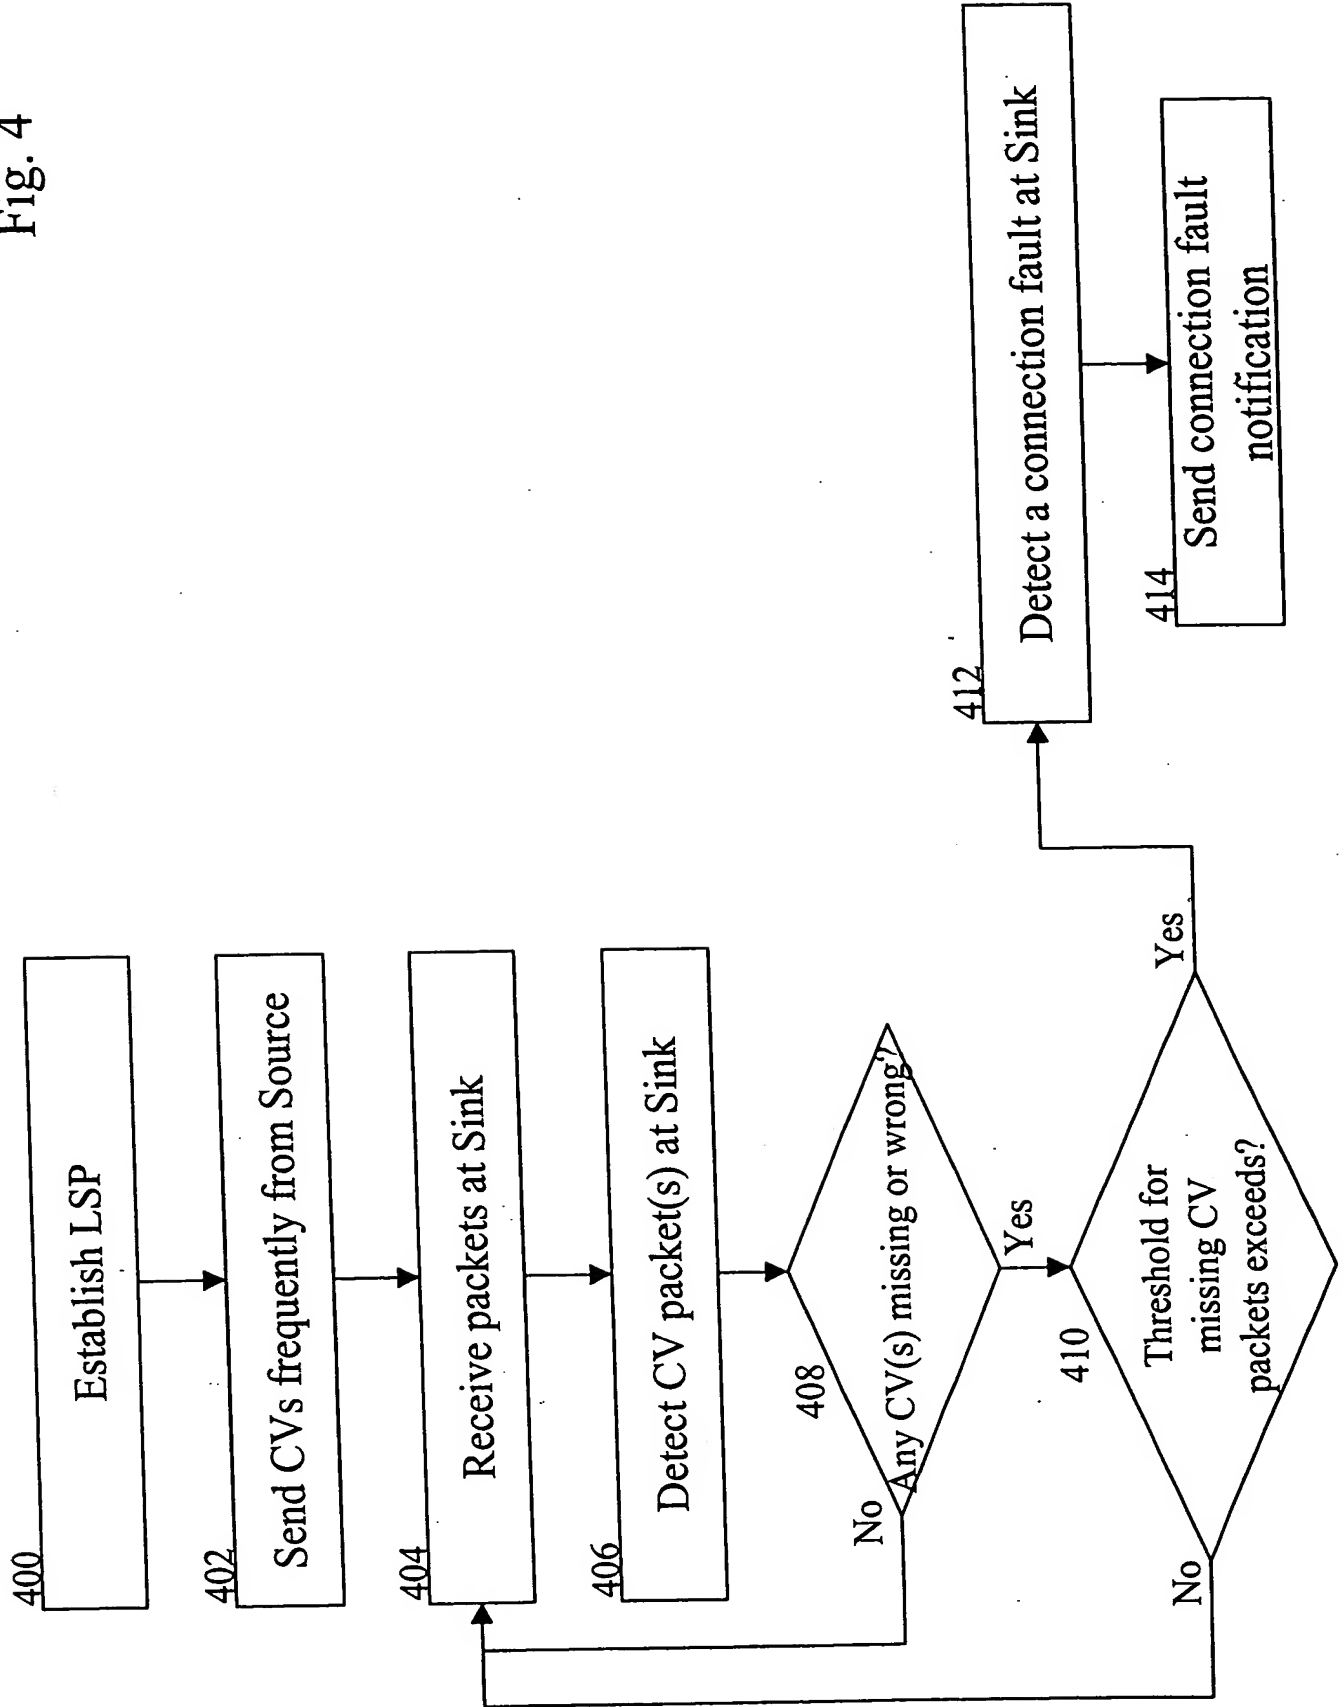


Fig. 5

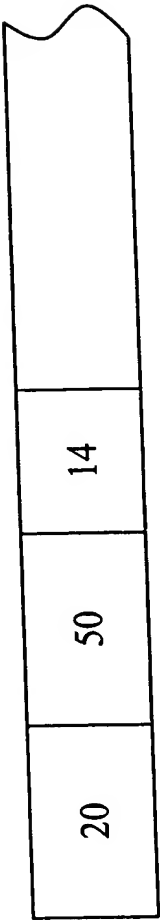
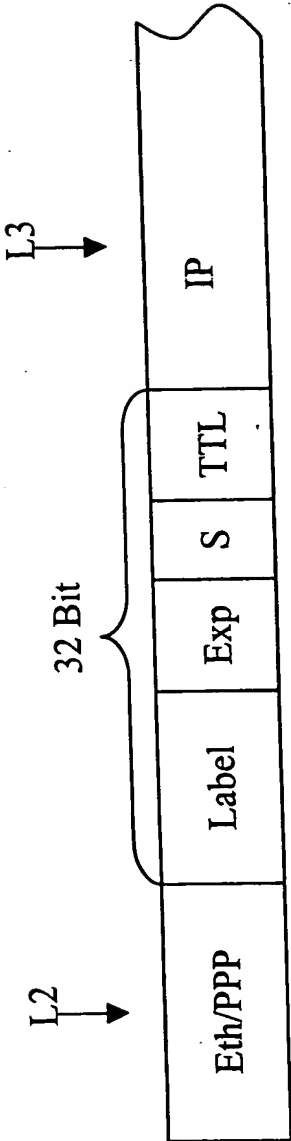


Fig. 6



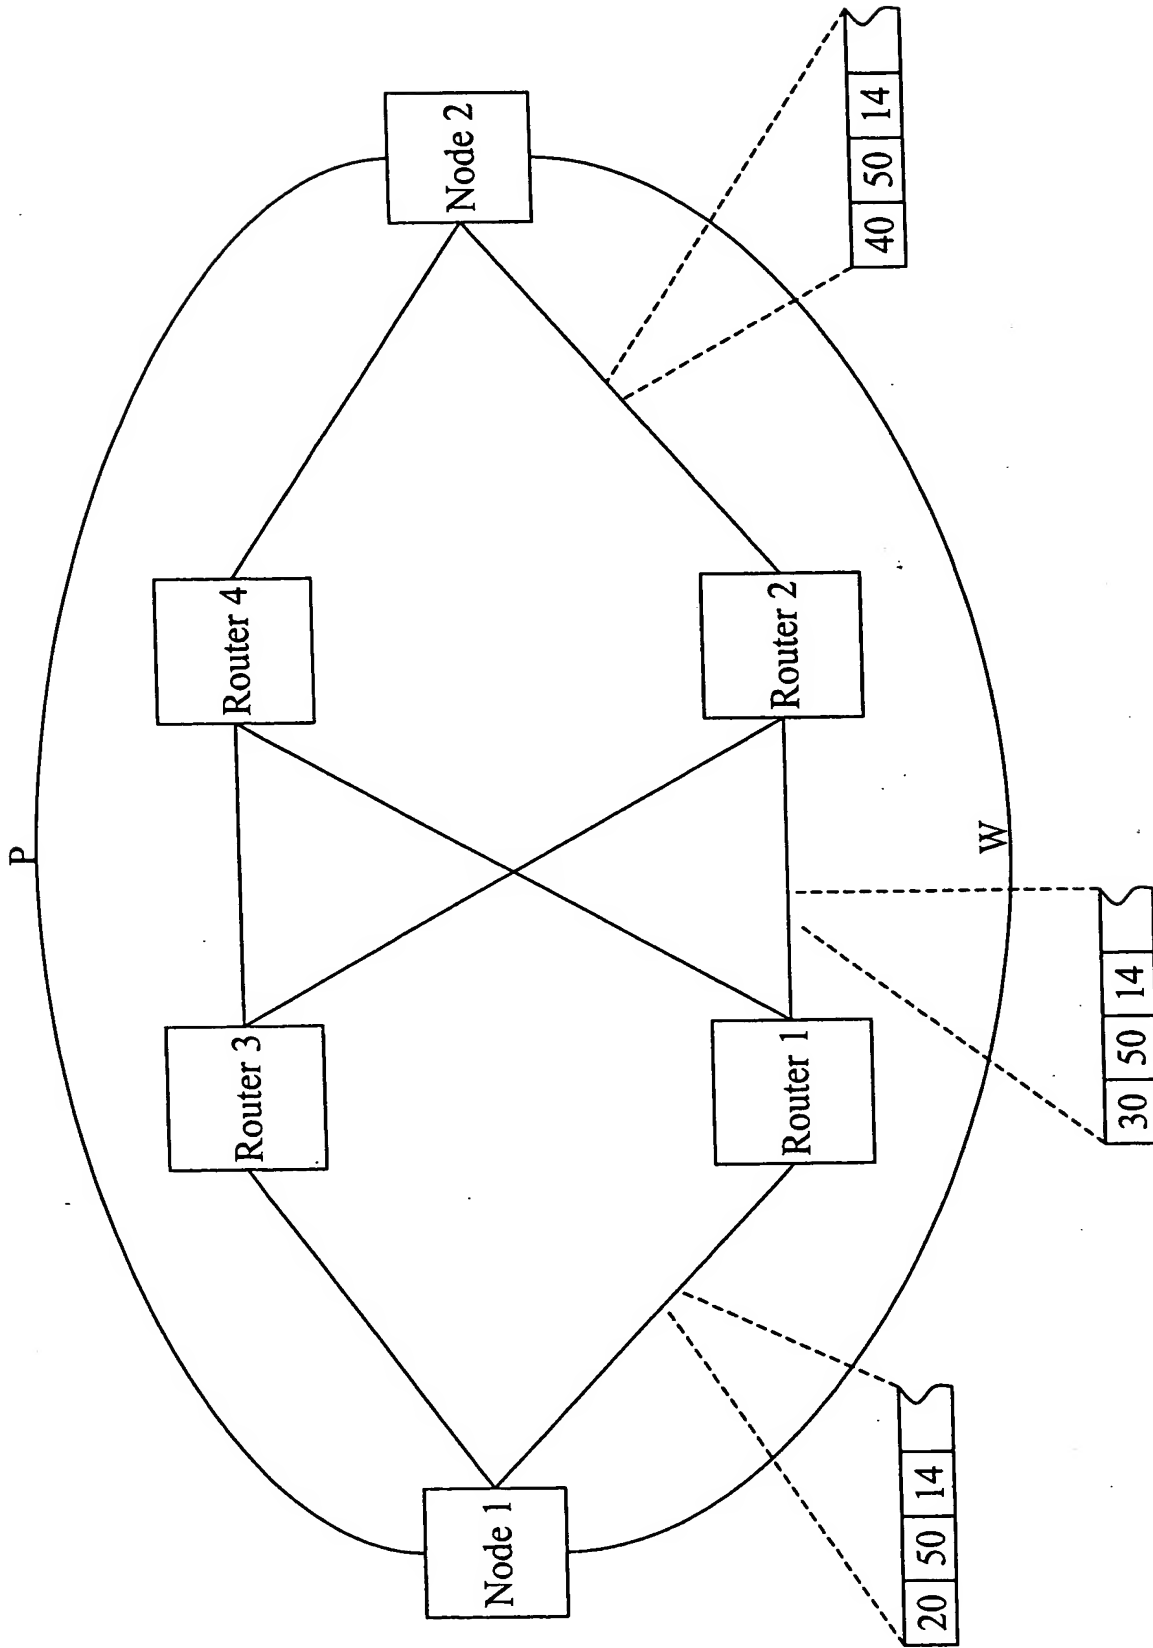


Fig. 7